

Instruction Manual of Electric Hanging Carbinet Basket



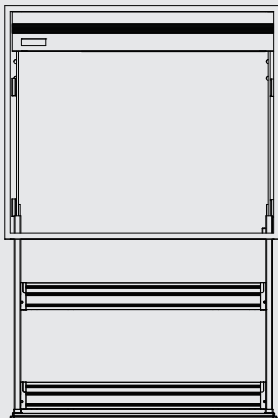


Scan the code on your
cell phone to view

The instructions apply to model Plus/Pro/Max/B/K/J 256,190,134 machine
It is recommended to have a professional master to guide the installation

Installation step 1:


1. Check the size of the cabinet, and before installing the hanging cabinet, put the power cable through the circular hole in the upper right corner of the back panel to facilitate subsequent wiring and connection

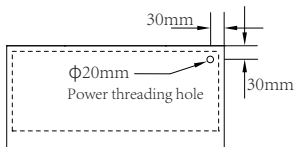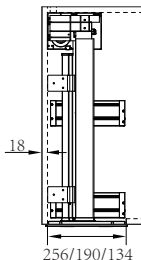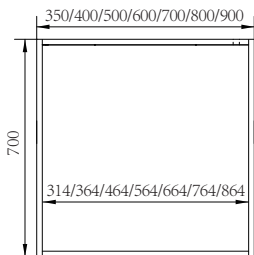

As per the dimension of the machine to make open hole positions.

Installation step 2:


2. Remove the cabinet panel(Fig.1), push the double layer lift basket from the open hole at the bottom of the hanging cabinet up to the top panel(Fig.2), and align it with the pre-buried hole above the top panel.First, fasten the screws on the top panel of the cabinet.

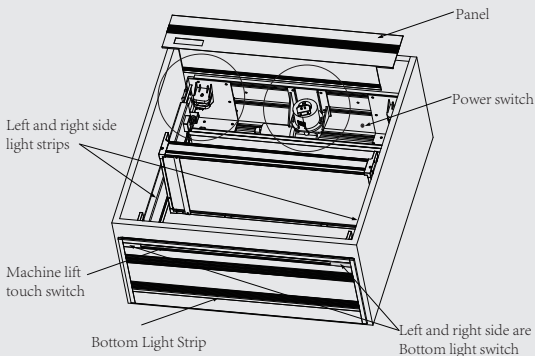

(Figure 1)

Installation step 3:


3. Turn on the circular power switch below the cabinet (Fig.1), touch the sensor bar on the base panel of the double layer lift basket(Fig.1),to lower it to the pre-set height($550+30\text{mm}$

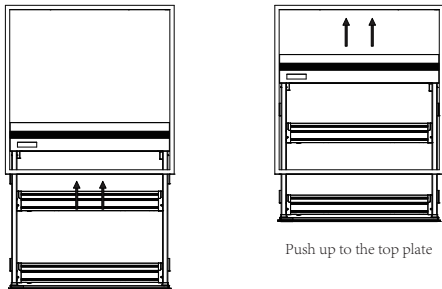

(Figure 2)

Installation step 4:


4. Fasten the four installation pegs on the inner side of the left and right slide rails with the side panel(Fig. 3)



(Figure 3)

Installation step 5:


5. Please remove the black rubber block at the top of the left and right slide rail (Fig. 4)



(Figure 4) Rubber block

Installation step 6:


6. Adjust the closure of the base panel of the double layer lift basket and the bottom of the hanging cabinet according to the diagram, and the upstroke switch can be adjusted up and down (Fig.5)

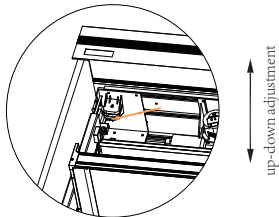

(Figure 5) Up stroke

Installation step 7:

7. Lower height adjustment, (Figure 6) switch to adjust the down stroke

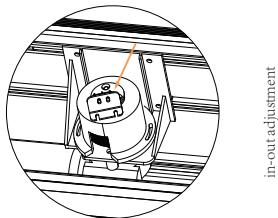

(Figure 6) Down stroke

Specification sheet

Model	PLUS256-350/400/500/600/700/800/900
Power supply	Input 110-240V 50HZ Output DC 12V
Maximum storage weight	20KG
Duration of rising	Around 8 seconds
Duration of dropping	Around 8 seconds
Lifting range	550mm

Countermeasures to malfunction

Status	Cause	countermeasures
Non-operatin	Power supply failure	turn on the power
No rising	The weight ofthe objects stored has exceeded 20KG	reduce the weight of the objects stored to below 20KG
No lowering	Check for tilting of the board	adjust to right position

Parts list

12V 5V adapter(1 piece)	Installation screws (1 pack)
Double layer lift basket	Installation instruction (1 piece)

