


Instruction Manual

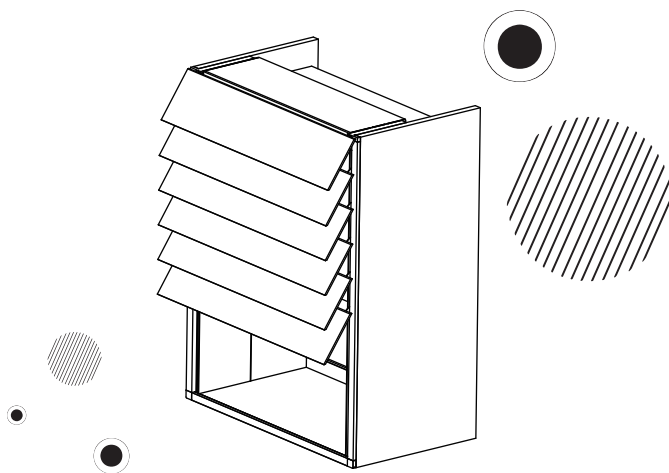

Smart Door Model A With Cabinet
(TSZH-A/Cabinet)

USER MANUAL

Safe Use Instructions

1. Not suitable for installation in outdoor open-air environments;
2. Avoid prolonged exposure to sunlight, or high-intensity lamp exposure;
3. Avoid using this product in corrosive areas;
4. Do not forcefully block the cabinet door during lifting and lowering to avoid damaging the components;
5. It is prohibited to replace the original factory adapter power to avoid short-circuiting and burning the product;
6. Unauthorized modifications void all warranty coverage;
7. Do not rinse the whole product with water to avoid short-circuit failure;
8. Use the product in accordance with the instructions in this manual and do not operate it blindly;

Basic Parameters

Input Voltage: 100-240V

Rated Power: 60W

Output Voltage: 12V

Width: 600/700/800/900mm

Height: 720、780mm


Material: Aluminum alloy + tempered glass

Wood Material: Density board

Descent Time: 8s

kfi-Collision Function: Yes

Fatigue Test: 30,000 times

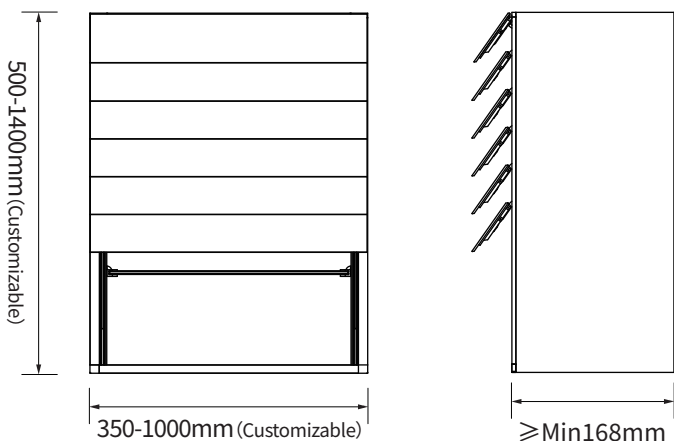

After-sales Warranty Card & Troubleshooting Guide

Common Failures and Causes Analysis

Solutions


- Smart door unresponsive/No power ————— Socket energized
- Won't descend after rising/glass is tilted ————— Adjust the motor position
- Cabinet door incomplete opening ————— Adjusting the cabinet size
-closing/cabinet size is wrong

Warranty Regulations:

- 1. Warranty Period: 5 years (from the date of purchase)
- 2. Warranty scope: electrical system and motor parts and accessories.
- 3. Damage or destruction of parts caused by non-compliance with the operating instructions will not be warranted.
- 4. Unauthorized modification or replacement of other brands of parts, resulting in motor burnout will not be warranted.

Users information	Product information	Purchase Date	Warranty Records
Name:	Size:	_Y _M _D	Warranty 01
Name:	Size:	_Y _M _D	Warranty 02
Name:	Size:	_Y _M _D	Warranty 03
Name:	Size:	_Y _M _D	Warranty 04


Product Component Diagram

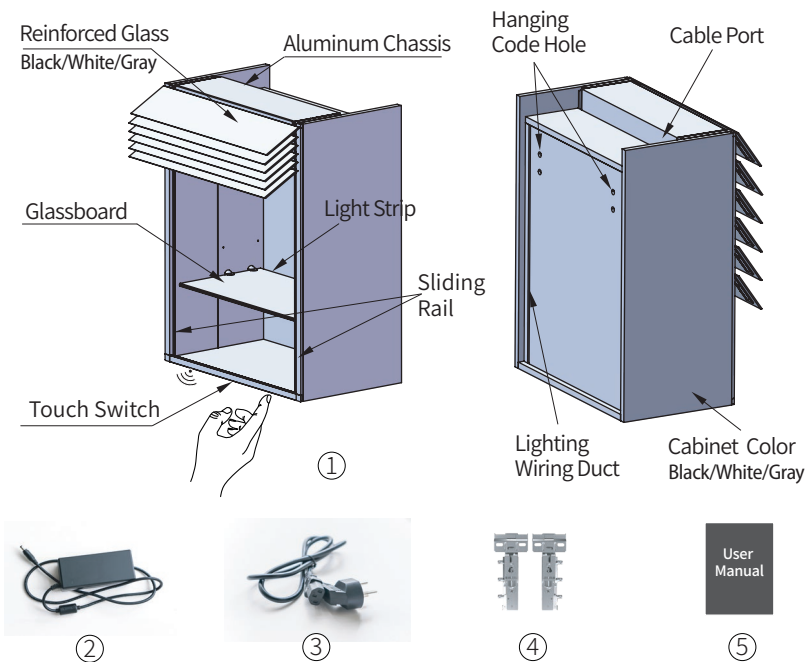


NO.	①	②	③	④	⑤
Name	Smart Door Body	Adapter	Power Cable	hanging code	User Manual
Pcs	1	1	1	1	1

Installation Instructions

1. Pre-installation: check cabinet level and mark drilling positions for hanging codes.

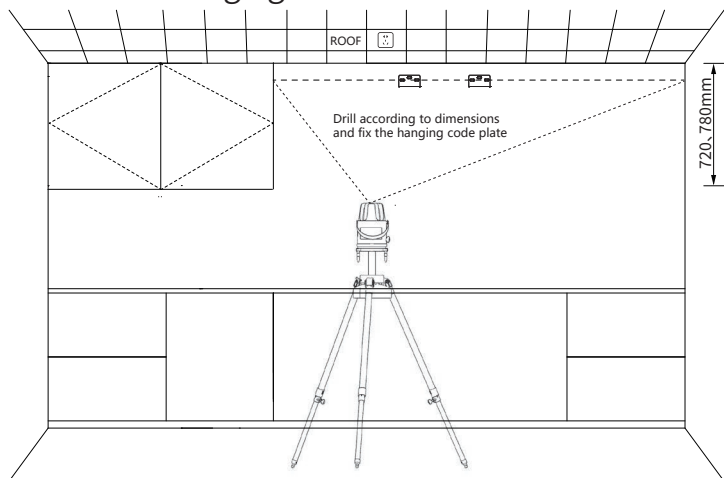

2. Use a lifting truck or manually lift the smart door to hook the hanging code onto the wall hanging plate.



Use a lifting truck or manually lift the smart door.




The back of the cabinet




Hang the smart door's back hanging codes on the wall plate.

Installation Instructions

3. Turn on the power, touch the switch at the bottom, and test whether the smart door can be opened.




Plug in the power supply

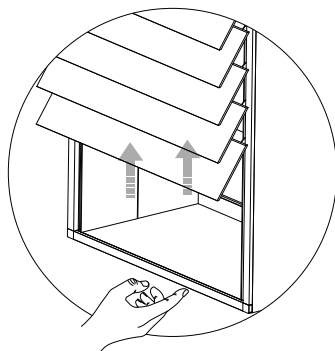


Touch switch

4. Check if the smart door cabinet base is level and straight.

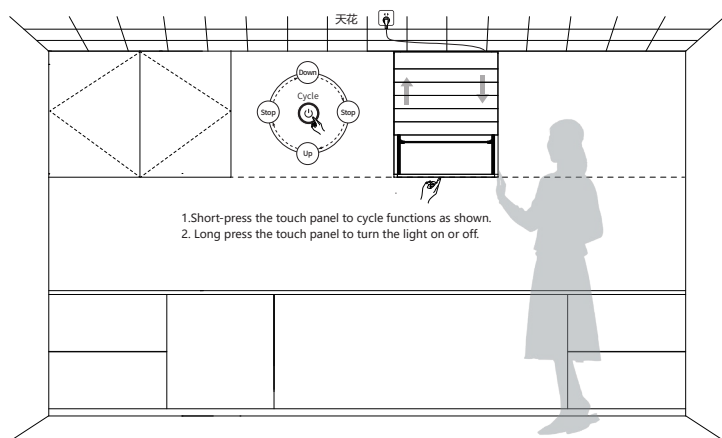

Cabinet Size Parameters

TSZH A Model Smart Door 900Wx780H Cabinet Drawing

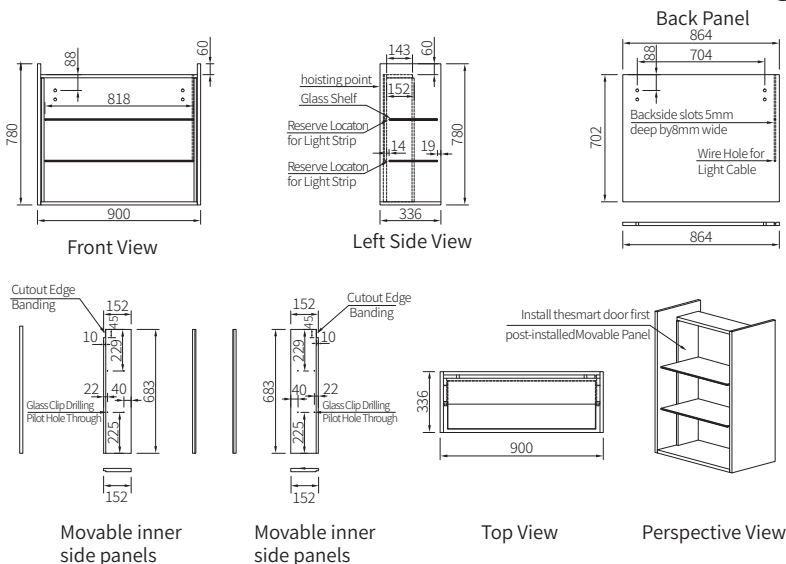

Cabinet width(W)	Cabinet height(H) H=720	Backboard Height	Cabinet depth(D)	Glass size
W=600	H=720MM	702MM	≥168MM	598x120x4MM
W=700	H=720MM	702MM	≥168MM	698x120x4MM
W=800	H=720MM	702MM	≥168MM	798x120x4MM
W=900	H=720MM	702MM	≥168MM	898x120x4MM

Cabinet width(W)	Cabinet height(H) H=780	Backboard Height	Cabinet depth(D)	Glass size
W=600	H=780MM	762MM	≥168MM	598x130.4x4MM
W=700	H=780MM	762MM	≥168MM	698x130.4x4MM
W=800	H=780MM	762MM	≥168MM	798x130.4x4MM
W=900	H=780MM	762MM	≥168MM	898x130.4x4MM